


LOCKING POINT FOR WOODEN AND OSB STRUCTURES

MARKING
34B

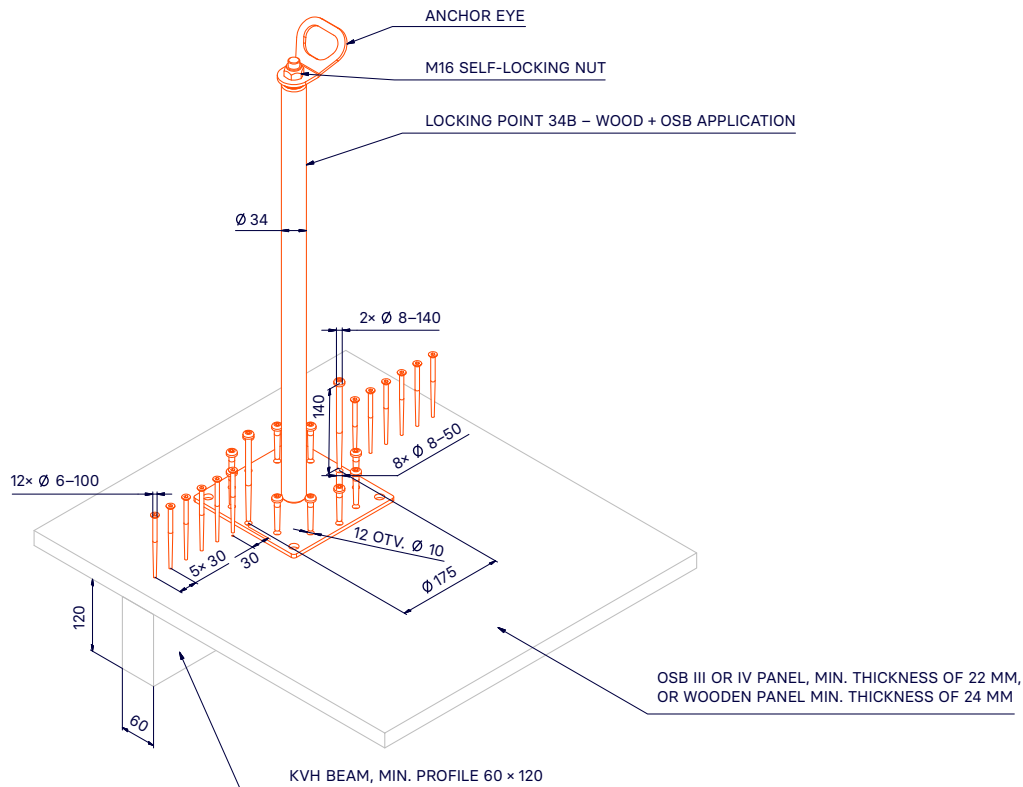

INTENDED USE	Means of personal fall protection
MATERIAL	Steel Class 11
SURFACE FINISH	Cataphoretic coating
CERTIFICATION	According to ČSN EN 795:2013 (1 person) and according to ČSN P CEN/TS 16415:2013 (up to 3 persons):
PART OF THE SHIPMENT	1 piece Anchor eye, 1 piece M16 self-locking nut
RECOMMENDED ACCESSORIES	2 pieces RAPI-TEC SK Screw 8 x 140, 10 pieces RAPI-TEC Screw for carpentry fittings 8 x 50, 12 pieces RAPI-TEC 2010 Screw 6 x 100 with a conical head
NOMINAL HEIGHT OF THE LOCKING POINT	200 mm – marking 34B-200
	300 mm – marking 34B-300
	400 mm – marking 34B-400
	500 mm – marking 34B-500
	600 mm – marking 34B-600
700 mm – marking 34B-700	
DETERMINATION OF HEIGHT OF THE LOCKING POINT	Nominal height of the locking point = Height of the roof structure + 100 to 200 mm
MANUFACTURER	Axel Group s.r.o.
TIGHTENING TORQUES	M16 self-locking nut: do not tighten, the anchor eye swivels freely with minimum play
	RAPI-TEC SK Screw 8 x 140: tightening torque 24 ± 3 Nm
	RAPI-TEC Screw 8 x 50 24 ± 3 Nm for carpentry fittings
	RAPI-TEC 2010 Screw 6 x 100 conical head: tightening torque 10 ± 2 Nm
ASSEMBLY	Without pre-drilling, diameter 8 mm – TOR X 40, diameter 6 mm – TOR X 30