


STAINLESS STEEL ANCHOR POINT FOR WOODEN AND OSB STRUCTURES

DESIGNATION
34B

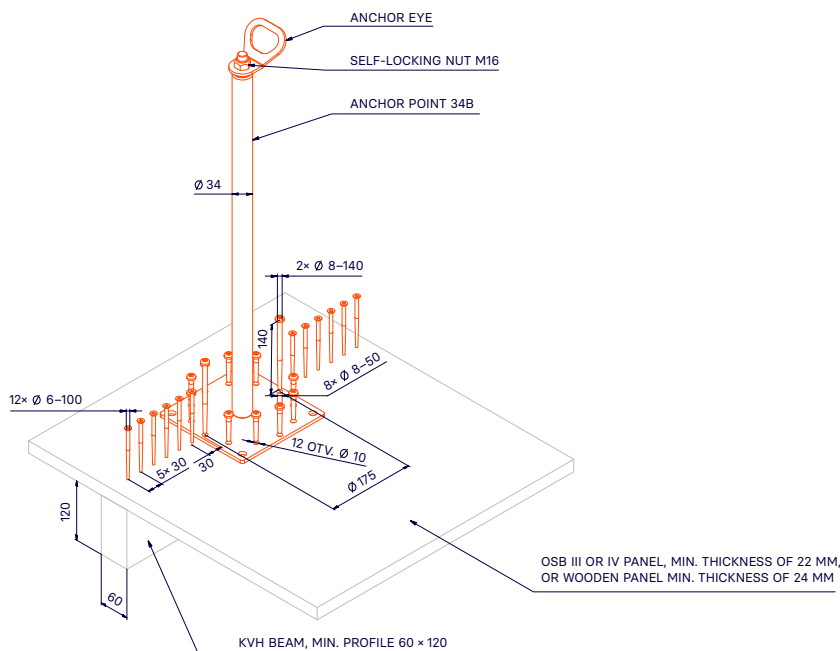

INTENDED USE	Means of personal fall protection
MATERIAL	Stainless steel 1.4301
CERTIFICATION	According to ČSN EN 795:2013 (1 person) and according to ČSN P CEN/TS 16415:2013 (up to 4 people)
PART OF THE DELIVERY	1x ANCHOR EYE, 1x Nut M16 SELF-LOCKING
RECOMMENDED ACCESSORIES	2x screw RAPI-TEC SK 8x140, 10x screw RAPI-TEC for carpentry fittings 8x50, 12x screw RAPI-TEC 2010 6x100 with a conical head
NOMINAL HEIGHT OF THE SECURING POINT	200mm – marking 34B-200 300mm – marking 34B-300 400mm – marking 34B-400 500mm – marking 34B-500 600mm – marking 34B-600 600mm – marking 34B-600 700mm – marking 34B-700
DETERMINING THE HEIGHT OF THE SECURING POINT	Nominal height of the anchor point = Height of the roof structure + 100 to 200 mm
MANUFACTURER	Axel Group s.r.o
TIGHTENING TORQUES	Self-locking nut M16: do not tighten, anchor eye rotates freely with minimal play Screw RAPI-TEC SK 8x140: tightening torque 24 Nm Carpentry screw RAPI-TEC 8x50 24 Nm Screw RAPI-TEC 2010 6x100 conical head: tightening torque 10 Nm
CONSTRUCTION	Without pre-drilling, diameter 8 mm – TORX 40, diameter 6 mm – TORX 30